

SPECIFICATION SHEET

PRODUCT # : CL-130B-AB

• Down Light

• Brass

Fixture Specifications:

Housing: Corrosion resistant solid brass.
Shroud is adjustable and extendable.

Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. Fixture also available in **GM- Gun Metal.**

Lens: Clear and heat resistant tempered flat glass.

Socket: Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place

Lamp: 12V, MR-8 halogen 20W max. L-ADL-10 (10w) standard. 1.5W LED lamp also available. See lamp guide below for more information.

Wiring: Fixture is prewired with a 5ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Universal connector (**CX-839**) or gel filled wire nut (**CX-854**) is available from Corona Lighting.


Gasket: Silicone gasket for water tight sealing.

Knuckle: Adjustable cast brass knuckle with thumb screw.

Mounting: Brass round Canopy with 1/2" NPT threaded female hub. CX-719B Brass mounting bracket is also available.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 10V-30V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.

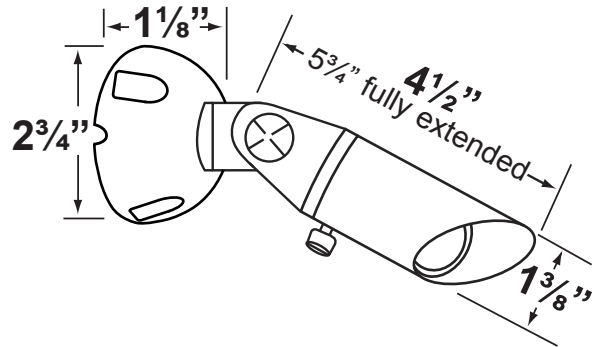

ACCESSORY



Mounting Bracket

CX-719B-AB
AB- Antique Bronze

Fixture is also available with CX-719B-AB. Price remains the same as listed.

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.
L-ED8-1.5W	1.5	100° FL	100	2700K

AVAILABLE HALOGEN LAMPS, Front Glass

LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.
L-ADL-10	10	20° NF	300	3000K
L-CMP-20	20	20° NF	900	3000K

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**
CL - 130B-AB - L-ED8 - 1.5W

Example: CL-130B-AB-L-ED8-1.5W

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.